



UTG 978


QUICK DETACHABLE DOUBLE RAIL SIDE MOUNT

MOUNT INSTALLATION



CAUTION: Make sure firearm is not loaded. Remove magazine and examine chamber. Use safe handling procedures at all times.

MNT - 978

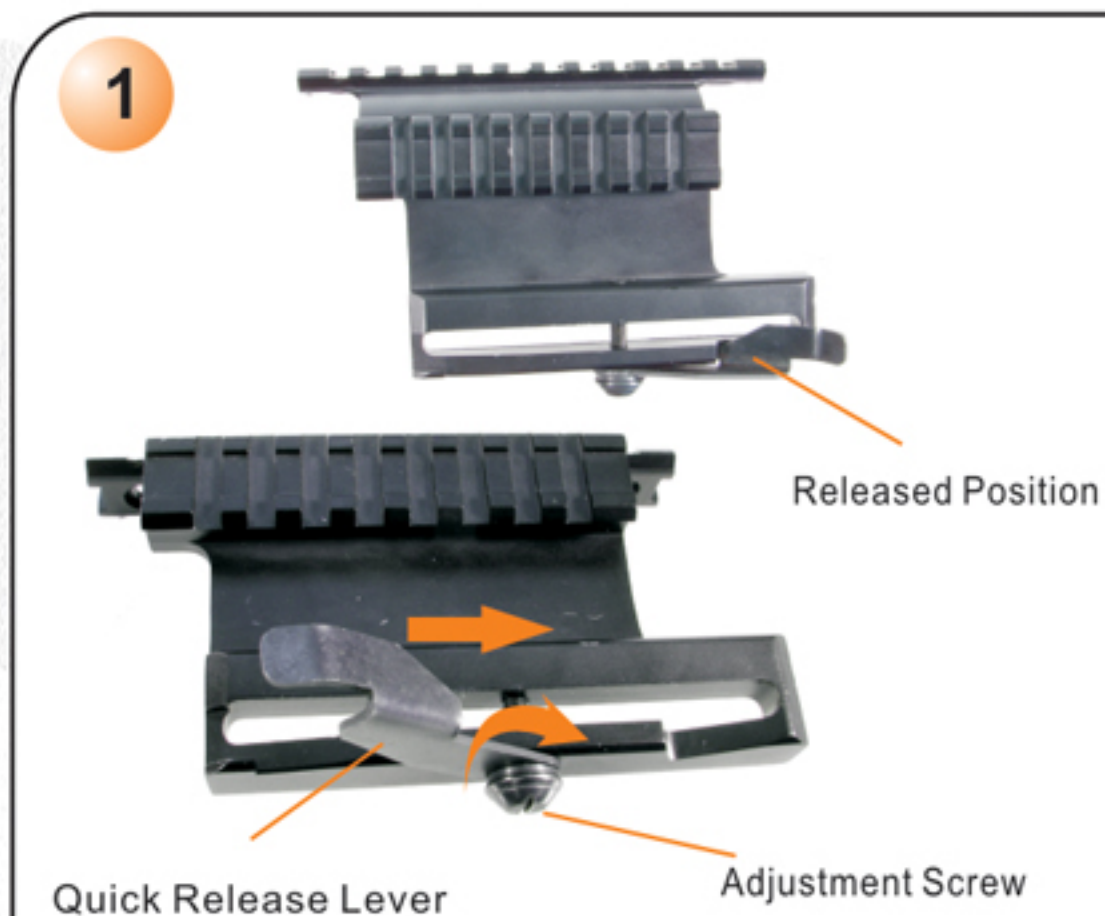

Quick Release Lever

Adjustment Screw

Before installation, first loosen the Adjustment Screw by turning it clockwise. Make sure that the Quick Release Lever is at the Released Position.



Slide the mount onto the side rail and keep pushing forward until the mount is fully engaged.



The Quick Release Lever at this point should be at the Released Position (pointing rear) as shown in 1. Use your fingers to gently turn the Adjustment Screw counter-clockwise for proper lever tension. Do not over-tighten.



Set the Quick Release Lever to the Locked Position (pointing forward) and make sure the mount is completely secured.

Refine the fit adjustment by going through 3 and 4 if needed.

Warning: Please do NOT over tighten the Adjustment Screw to avoid damaging the Quick Secure/Release function.